

Zapis z badania konstruktorskiego nr 2015-05-28_1210


Date of test:	2015-05-28
Tester:	Tomasz Woźnica
Checked by:	-
Customer:	ECS Piotr Paruszewski ul. H. Kołłątaja 2, 63-520 Grabów
Standard used:	PN-EN 61000-4-4:2013-05
Application:	Power Supply AC
Temperature:	(21-23) °C
Humidity:	(47-53) %
EUT:	Jonizator TP-24
EUT S/N:	bez oznaczenia
Description:	EUT testowano z włączonymi oboma blokami.

Test Procedure

Pulse Name:	PN-EN 61000-4-4:2013-05		
Test generator:	UCS500N7	Software No.:	006050
		Serial No.:	V1025106803
Software:	iec.control	Version:	5.1.8.0

Test Setup

V:	2000	V
f:	5	kHz
td:	15	ms
tr:	300	ms
Mode:	Asynchronous	
Polarity:	Alternate	
Coupling:	L+N+PE	
Test duration:	2	min
Time between Tests:	10	s

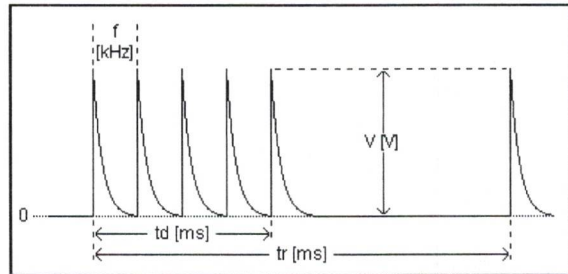

Test Result

V:	±2000	V	f:	5	kHz
			td:	15	ms
			tr:	300	ms
Coupling:	L+N+PE				
Elapsed Test time:	4 min 20 s				
Result:	Brak widocznego wpływu narażenia na EUT, dźwięk ulotu elektrycznego słyszalny podczas trwania testu				

2015-06-24

(Date)

(Sign)

